


TWIN SHAFT COMPULSORY MIXERS




MIXERS MB/S

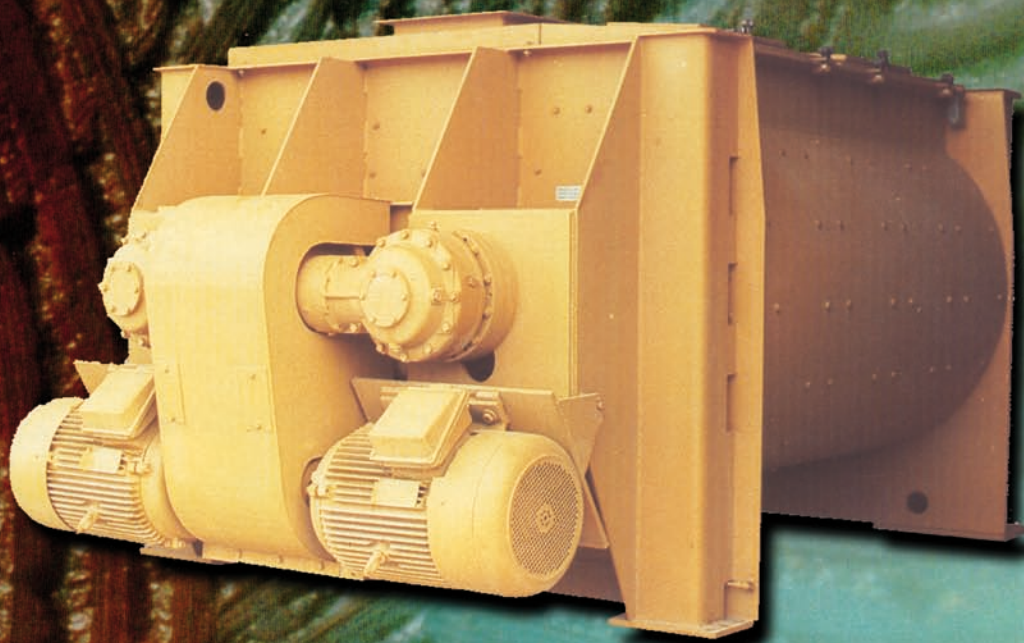

S.C.M.2

Impianti di Dosaggio e Betonaggio
Concrete Batching Plants
Centrales à béton

TIPO TYPE TYPE	Cap. di carico in vasca Volumetric loading capacity Cap. de chargement en cuve	Resa soffice Fresh Concrete capacity Rendement pas vibré	Resa vibrata Compacted concrete capacity Rendement vibré	Potenza Mescol. kW. Mixing Power kW. Puissance malaxage kW.	Pale di Mescolaz. Mixing Shovels Pales de Malaxage	Portata Cent. idr. l/h Oleodynamic pump delivery l/h Débit distrib. hydraulique l/h	Potenza Cent. idr. kW. Power Hydraulic unload. kW. Puissance Vidange Hyd. kW.	Velocità skip a semplice velocità m/1 SingleSkip lifting speed m/1' Vitesse Unique Skip m/1'	Velocità skip a doppia velocità m/1' Double Skip lifting speed m/1' Vitesse Double Skip m/1'	Potenza Skip kW. Power Skip kW. Puissance Mouvement skip kW.	Capacità skip Skip capacity Cap. de chargement skip	Peso App. senza skip Weight without skip Poids approx. sans skip
MB/S 750	LT. 750	LT. 625	LT. 500	18,5	12	8,7	1,5	19	19/38	5,5	LT. 750	2.800
MB/S 1125	LT. 1.125	LT. 940	LT. 750	22	16	8,7	1,5	19	19/38	7,5	LT. 1125	3.100
MB/S 1500	LT. 1.500	LT. 1.250	LT. 1.000	2x18,5	12	8,7	1,5	19	19/38	9,2	LT. 1500	4.300
MB/S 2000	LT. 2.000	LT. 1.670	LT. 1.335	2x22	16	8,7	1,5	19	19/38	11	LT. 2000	4.650
MB/S 2500	LT. 2.500	LT. 2.080	LT. 1.670	2x30	16	8,7	1,5	19	19/38	15	LT. 2500	5.400
MB/S 3000	LT. 3.000	LT. 2.500	LT. 2.000	2x37	12	8,7	1,5	19	19/38	18,5	LT. 3000	6.700
MB/S 3750	LT. 3750	LT. 3.125	LT. 2.500	2x45	12	8,7	1,5	19	19/38	22	LT. 3750	7.800
MB/S 4500	LT. 4.500	LT. 3.750	LT. 3.000	2x55	16	8,7	1,5	19	19/38	26	LT. 4500	9.000
MB/S 5000	LT. 5.000	LT. 3.750	LT. 3.000	2x75	16	8,7	1,5	19	19/38	26	LT. 5000	9.350
MB/S 6000	LT. 6.000	LT. 5.000	LT. 3.000	2x75	16	8,7	1,5	----	----	----	----	10.800
MB/S 6750	LT. 6.750	LT. 5.000	LT. 3.000	2x90	16	8,7	1,5	----	----	----	----	11.100
MB/S 9000	LT. 9.000	LT. 5.000	LT. 3.000	2x110	16	8,7	1,5	----	----	----	----	14.000

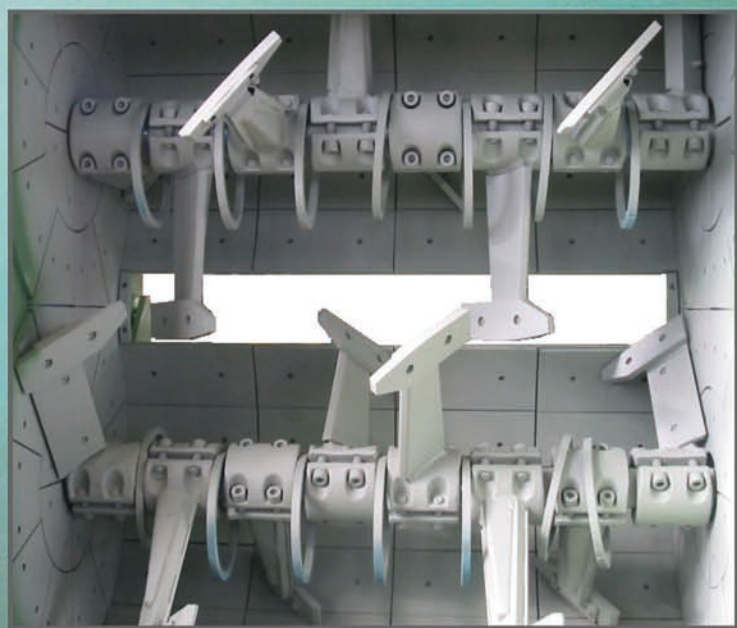

OPTIONAL EQUIPMENTS

Welded arms on the shafts.
 Automatic grease lubrication plant.
 Automating cleaning plant.
 Waiting hopper for aggregates, over the mixer.
 Waiting hopper for concrete.
 Steel supporting frame, inspection platform
 with handrail, stair.
 Tunnel to feed truck-mixers.
 Hand pump for the emergency opening of the
 discharge door (in the event of black out).
 Shaft cleaning rings.
 Double speed sloping skip.



S.C.M. 2 S.r.l.

Impianti di dosaggio e betonaggio
 Concrete batching plants
 Centrales à béton

Via Pier Paolo Pasolini, 6 - 20845 SOVICO (MB)
 Tel. +39 039 2323321-2016350 Fax +39 039 2323329
 E.mail info@scm-impiani.it - www.scm-impiani.it